



Selecting the right flashings

Redland

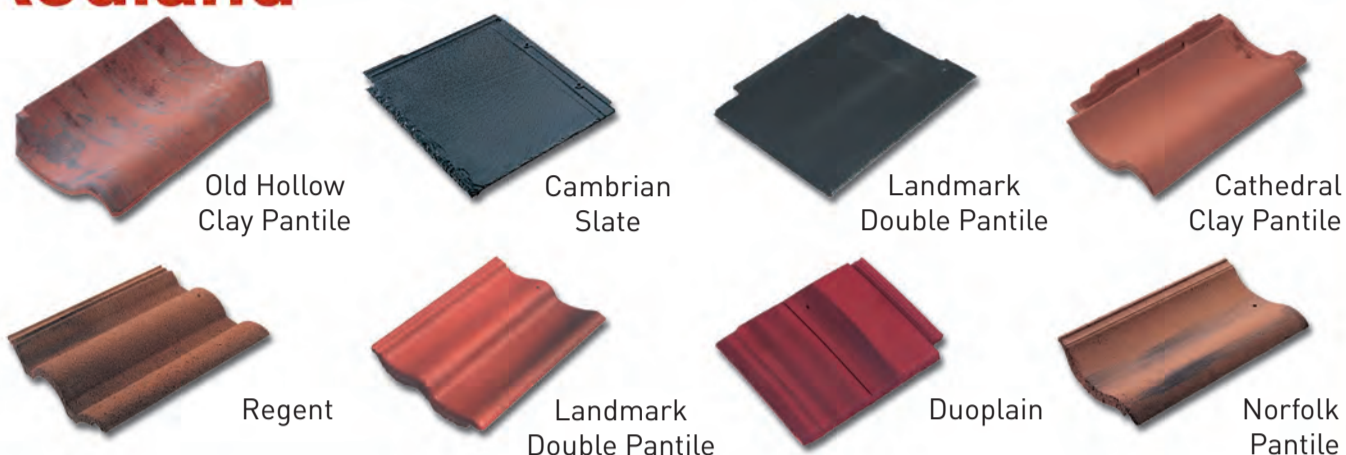

FLASHING	INSTALLATION	ROOF PITCH
TRF	SINGLE	20° - 90°
BLTRF	BI-LITE	20° - 90°
CTRF	COMBI	20° - 90°
DTRF	SINGLE	15° - 90°
BLDTRF	BI-LITE	15° - 90°
CDTRF	COMBI	15° - 90°


MARLEY Eternit

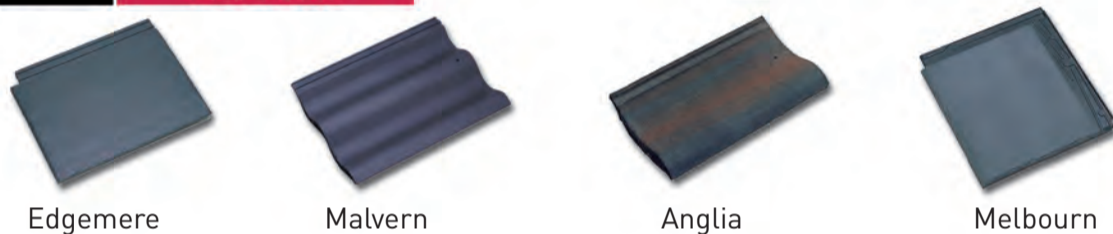


FLASHING	INSTALLATION	ROOF PITCH
DTRF	SINGLE	15° - 90°
BLDTRF	BI-LITE	15° - 90°
CDTRF	COMBI	15° - 90°



FLASHING	INSTALLATION	ROOF PITCH
PTRF	SINGLE	25° - 90°
BLDTRF	BI-LITE	25° - 90°
CPTRF	COMBI	25° - 90°

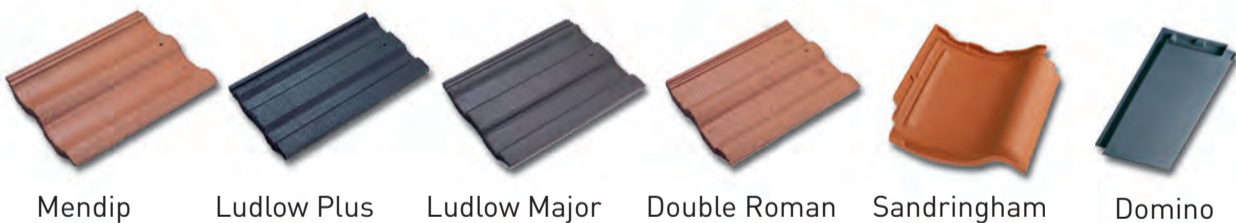

FLASHING	INSTALLATION	ROOF PITCH
DTRF	SINGLE	25° - 90°
BLDTRF	BI-LITE	25° - 90°
CPTRF	COMBI	25° - 90°

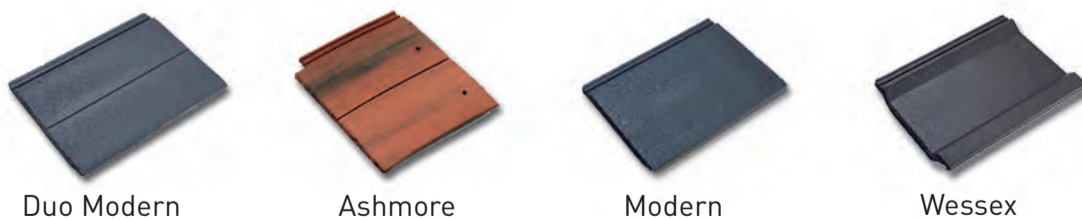

FLASHING	INSTALLATION	ROOF PITCH
TRF	SINGLE	20° - 90°
BLTRF	BI-LITE	20° - 90°
CTRF	COMBI	20° - 90°
DTRF	SINGLE	15° - 90°
BLDTRF	BI-LITE	15° - 90°
CDTRF	COMBI	15° - 90°

Redland



FLASHING	INSTALLATION	ROOF PITCH
TRF	SINGLE	20° - 90°
BLTRF	BI-LITE	20° - 90°
CTRF	COMBI	20° - 90°
DTRF	SINGLE	15° - 90°
BLDTRF	BI-LITE	15° - 90°
CDTRF	COMBI	15° - 90°

Redland



FLASHING	INSTALLATION	ROOF PITCH
PTRF	SINGLE	25° - 90°
BLDTRF	BI-LITE	25° - 90°
CPTRF	COMBI	25° - 90°